
Sale Name: Deep Jack Road 830 Page 156-A

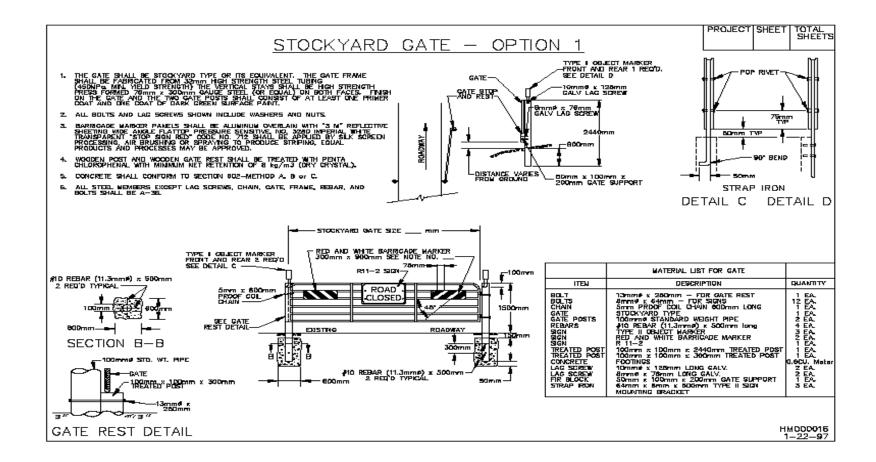

General Notes:

- This diagram is an example only. Gate signs shown in the example diagram are not correct.
- 2) Type III Barricades (retro-reflective) are needed for all gates. These can be mounted to the gates or can stand alone in front of the closed gates. The barricade shall span the entire roadbed width. Orange stripes shall be positioned downward toward the center of the barricade. A "Road Closed" (R11-2 (48"x30")) sign needs to be mounted to the barricade face.
- 3) The gate needs to span the entire roadbed width. Typically two gates are needed as road bed width is at least 20 feet. The gate must have both purchaser and Forest Service locks installed in a manner that allows either party to access the closed road segment at any time.
- 4) All Traffic Control Devices shall meet MUTCD and Forest Service Standards
- 5) Purchaser shall adjust Traffic Control Devices in the field as necessary.
- 6) Purchaser shall not mount signs on trees or other signs.